




# Job submission queues

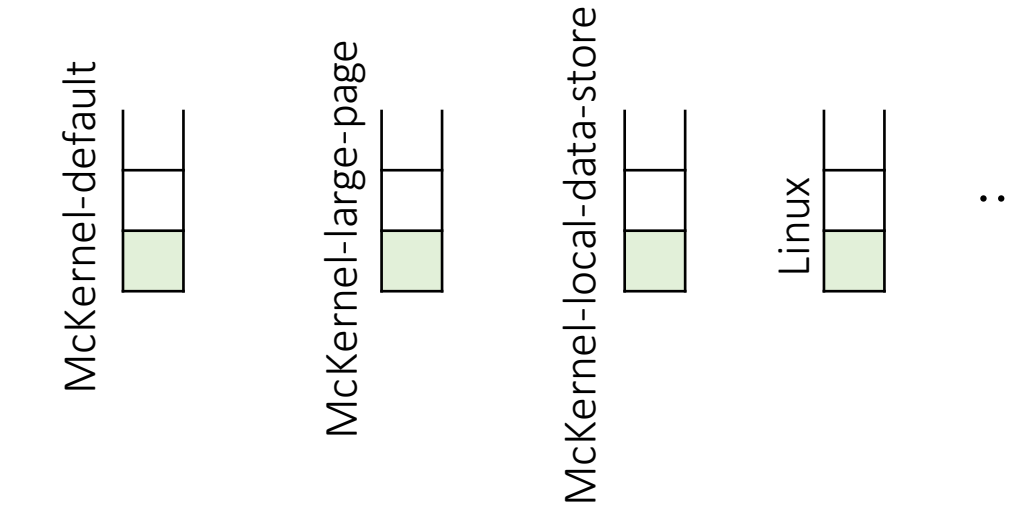

Launch McKernel and run app A on it

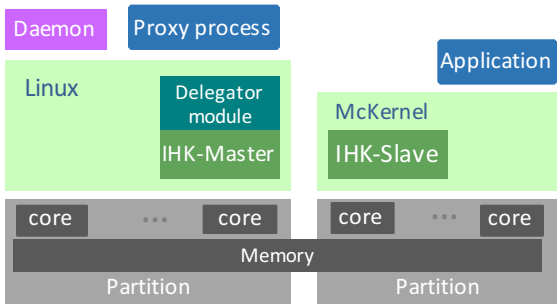


Launch  
Done

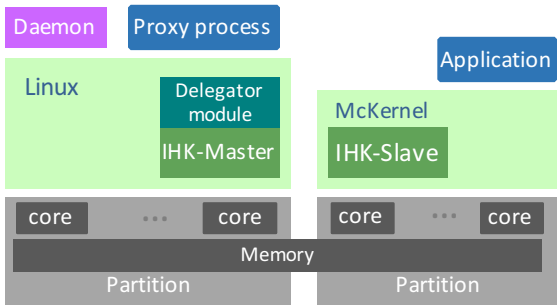

Launch  
Done

Launch McKernel with local data store and run app C on it


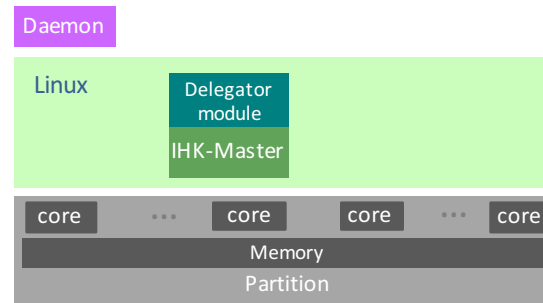


(1) Boot with Linux and wait for a job  
(3) Remove McKernel and wait for a job

Launch  
Done

Launch  
Done

(2) Launch McKernel with large page optimization and run app B on it

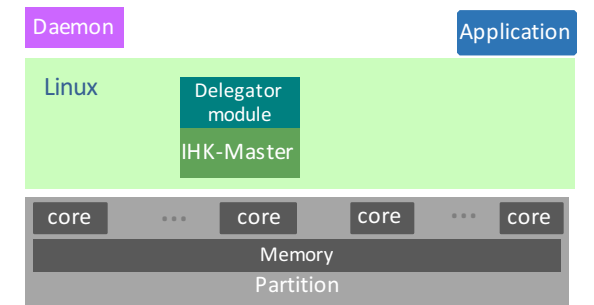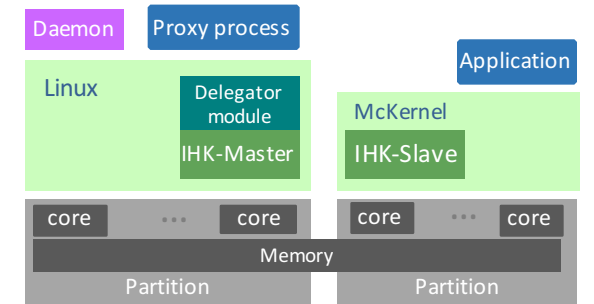

Run app D on Linux